Kabeldurchführungsleiste KADL || Cable Entry System KADL — F310-9xxx-zz

TECHNISCHE DATEN:

Aufbau

Leisten	Polyamid PA66 GF25 V-0
Dichtung	TPE TPS

Eigenschaften

Technik	werkzeugfreie Durchführungs- und Anschlusstechnik für Maschinen und Anlagen
Anwendung	mit der KADL können konfektionierte Leitungen mit Stecker in Gehäuse eingeführt und abgedichtet werden
Tüllen Varianten	als Zubehör auszuwählen und separat zu bestellen aus Serie F311-9xxx-zz, 7 kleine Tüllen für Leitungen ØC = 3,0 - 16,0 mm, 9 große Tüllen für Leitungen ØC = 15,0 - 32,5 mm, 1 kleine Tülle und 1 große Tülle geschlossen
Befestigung	einfache Montage bei Wandstärken von 1,5 bis 2,0 mm durch Einrasten, bei Wandstärken über 2,0 mm kann die KADL angeschraubt werden
Temperaturbereich	-30 °C / +100 °C
Schutzart	IP65
Prüfnorm	UL 514B
UL / CSA-File	E140310

TECHNICAL DATA:

Configuration

Frames	Polyamide PA66 GF25 V-0
Sealing	TPE TPS

Properties

Technology	tool-free entry and connection technology for machines and equipment
Application	insertion and sealing of pre-assembled cables with connectors into housings
Variants of grommets	order as accessory from series F311-9xxx-zz, 7 small grommets for cables ØC = 3,0 - 16,0 mm, 9 large grommets for cables ØC = 15,0 - 32,5 mm, 1 small grommet and 1 large grommet closed
Mounting	mounting in wall thicknesses from 1,5 to 2,0 mm, for walls with thicknesses greater than 2,0 mm the KADL can be attached
Temperature range	-30 °C / +100 °C
Protection grade	IP65
Test standard	UL 514B
UL / CSA-File	E140310

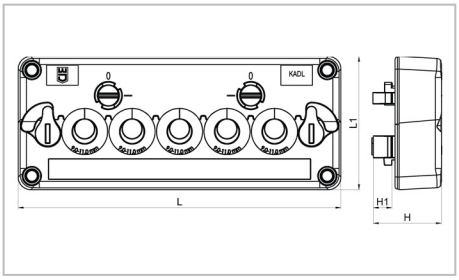

Merkmale — Characteristics

Leisten-Set ohne Tüllen
Frame set without grommets

Zubehör
Accessories
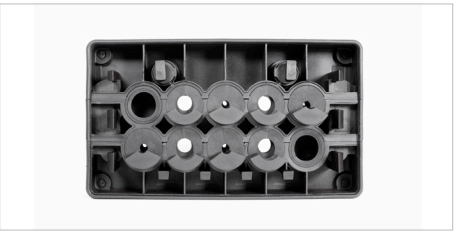
Bezeichnung Description	Lochmaß Hole size mm	L mm	L1 mm	H mm	H1 mm	Tülle klein Grommet small Stück / Pieces	Tülle groß Grommet large Stück / Pieces		schwarz black Art.-Nr. / Part No.
KADL 1K/2G	125 x 35	153	63	32,3	8,9	1	2	1	F310-9035-01
KADL 5K	125 x 35	153	63	32,3	8,9	5	0	1	F310-9035-02
KADL 10K	125 x 57,5	153	85,5	32,3	8,9	10	0	1	F310-9057-01
KADL 2K/4G	125 x 80	153	108	32,3	8,9	2	4	1	F310-9080-01
KADL 6K/2G	125 x 80	153	108	32,3	8,9	6	2	1	F310-9080-02
KADL 15K	125 x 80	153	108	32,3	8,9	15	0	1	F310-9080-03
KADL 11K/2G	125 x 102,5	153	130,5	32,3	8,9	11	2	1	F310-9102-01
KADL 20K	125 x 102,5	153	130,5	32,3	8,9	20	0	1	F310-9102-02
KADL 3K/6G	125 x 125	153	153	32,3	8,9	3	6	1	F310-9125-01
KADL 7K/4G	125 x 125	153	153	32,3	8,9	7	4	1	F310-9125-02
KADL 16K/2G	125 x 125	153	153	32,3	8,9	16	2	1	F310-9125-03
KADL 25K	125 x 125	153	153	32,3	8,9	25	0	1	F310-9125-04